


# Cartridge

## 338 Federal - 225 grain

Version 9.0

# NOSLER®

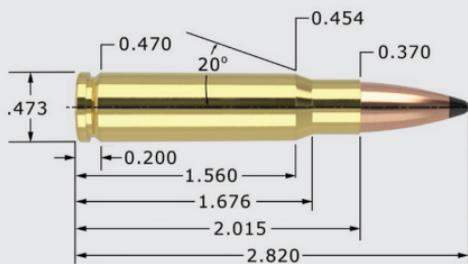

## 338 Federal - 225 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		2.820"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	225gr. Spitzer	2.800"	0.550	0.281
Expansion Tip®	<b>ET</b>	225gr. Spitzer	2.760"	0.611	0.281
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	225gr. Spitzer	2.760"	0.454	0.281

CASE TYPE:	Federal	PRIMER TYPE	Fed 210
CASE HOLDS:	42.3 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 3031</b>	40.0 MAX.	2370	** 105%
	38.0 *	2284	100%
	36.0	2197	95%
<b>AA 2495</b>	42.0 MAX.	2371	** 113%
	40.0 *	2276	** 107%
	38.0	2180	** 102%
<b>H335</b>	41.5 * MAX.	2371	100%
	39.5	2295	95%
	37.5	2218	90%
<b>TAC</b>	42.5 MAX.	2381	** 102%
	40.5 *	2290	97%
	38.5	2199	92%
<b>Benchmark</b>	41.0 * MAX.	2384	** 105%
	39.0	2287	100%
	37.0	2190	95%
<b>IMR 4895</b>	43.5 MAX.	2397	** 112%
	41.5	2306	** 107%
	39.5 *	2216	** 102%
<b>N135</b>	42.0 MAX.	2398	** 115%
	40.0	2312	** 110%
	38.0 *	2225	** 104%
<b>RL15</b> Most Accurate Powder Tested	45.0 MAX.	2406	** 111%
	43.0	2317	** 106%
	41.0 *	2228	** 101%
<b>W748</b>	46.0 MAX.	2427	** 113%
	44.0 *	2344	** 108%
	42.0	2260	** 103%
<b>Varget</b>	44.0 MAX.	2428	** 112%
	42.0 *	2341	** 107%
	40.0	2253	** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load