


Cartridge

338 Lapua Mag - 200/210 grain

Version 9.0

NOSLER®

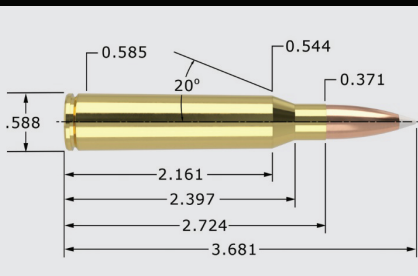

338 Lapua Mag - 200/210 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.681"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	200gr. Spitzer	3.580"	0.414	0.250
CT® Ballistic Silvertip®	BST	200gr. Spitzer	3.580"	0.414	0.250
Expansion Tip®	ET	200gr. Spitzer	3.580"	0.425	0.250
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	210gr. Spitzer	3.540"	0.400	0.263
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215		
CASE HOLDS:	106.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Magnum	100.5 * MAX.	3070	96%		
	98.5	3012	94%		
	96.5	2955	92%		
H4831SC	90.0 MAX.	3122	88%		
	88.0	3075	86%		
	86.0 *	3027	85%		
IMR 4350	84.0 MAX.	3128	85%		
	82.0 *	3092	83%		
	80.0	3057	81%		
H1000	95.5 * MAX.	3134	95%		
	93.5	3087	93%		
	91.5	3041	91%		
N560	88.5 MAX.	3144	93%		
	86.5	3075	91%		
	84.5 *	3005	89%		
IMR 7828	90.5 MAX.	3145	91%		
	88.5 *	3073	89%		
	86.5	3000	87%		
RL22	90.0 MAX.	3178	92%		
	88.0	3100	90%		
	86.0 *	3021	88%		
RL19	88.0 MAX.	3189	90%		
Most Accurate	86.0 *	3124	88%		
Powder Tested	84.0	3059	86%		
MAGPRO	95.0 MAX.	3192	92%		
	93.0 *	3134	90%		
	91.0	3077	89%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load