


# Cartridge

## 338 Lapua Mag - 225 grain

Version 9.0

# NOSLER®

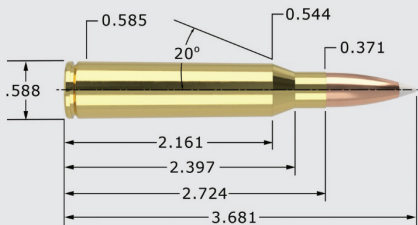

## 338 Lapua Mag - 225 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.681"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	225gr. Spitzer	3.580"	0.550	0.281
Expansion Tip®	<b>ET</b>	225gr. Spitzer	3.580"	0.611	0.281
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	225gr. Spitzer	3.540"	0.454	0.281

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	105.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4831SC</b>	86.0 MAX.	2985	85%
	84.0 *	2935	83%
	82.0	2884	81%
<b>H1000</b>	93.0 MAX.	2991	94%
	91.0	2933	92%
	89.0 *	2876	90%
<b>N165</b>	88.0 MAX.	2996	93%
	86.0 *	2942	91%
	84.0	2889	89%
<b>N560</b> Most Accurate Powder Tested	86.0 MAX.	3024	91%
	84.0 *	2959	89%
	82.0	2895	87%
<b>RL19</b>	86.0 MAX.	3038	89%
	84.0	2984	87%
	82.0 *	2930	85%
<b>IMR 7828</b>	89.0 MAX.	3042	90%
	87.0	2970	88%
	85.0 *	2898	86%
<b>Magnum</b>	100.0 MAX.	3046	97%
	98.0	2987	95%
	96.0 *	2928	93%
<b>Retumbo</b>	97.0 * MAX.	3079	99%
	95.0	3015	97%
	93.0	2952	95%
<b>N170</b>	98.5 * MAX.	3098	** 104%
	96.5	3040	** 102%
	94.5	2983	100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load