


# Cartridge

## 338 Lapua Mag - 250 grain

Version 9.0

# NOSLER®

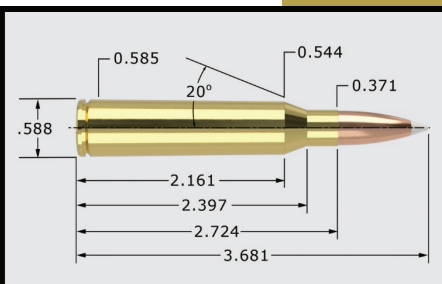

## 338 Lapua Mag - 250 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.681"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	250gr. Spitzer	3.580"	0.575	0.313
Expansion Tip®	<b>ET</b>	250gr. Spitzer	3.580"	0.627	0.313
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	250gr. Spitzer	3.540"	0.473	0.313

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	101.7 Gr. WATER	BARREL Length/Make	26' Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>N165</b>	87.0	MAX.	2876	95%
	85.0	*	2819	93%
	83.0		2762	91%
<b>H4831SC</b>	86.5	MAX.	2881	89%
	84.5		2828	87%
	82.5	*	2776	85%
<b>IMR 7828</b>	87.0	MAX.	2899	91%
	85.0		2830	89%
	83.0	*	2762	87%
<b>N560</b> Most Accurate Powder Tested	85.0	MAX.	2899	93%
	83.0	*	2834	91%
	81.0		2769	88%
<b>H1000</b>	94.0	* MAX.	2903	98%
	92.0		2855	96%
	90.0		2808	94%
<b>MAGPRO</b>	90.0	MAX.	2919	91%
	88.0	*	2876	89%
	86.0		2833	87%
<b>RL19</b>	85.0	MAX.	2923	91%
	83.0	*	2874	89%
	81.0		2824	87%
<b>Retumbo</b>	95.0	* MAX.	2934	** 100%
	93.0		2881	98%
	91.0		2829	96%
<b>RL22</b>	86.0	MAX.	2938	92%
	84.0	*	2874	90%
	82.0		2810	88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load