


# Cartridge

## 338 Lapua Mag - 265 grain

Version 9.0

# NOSLER<sup>®</sup>

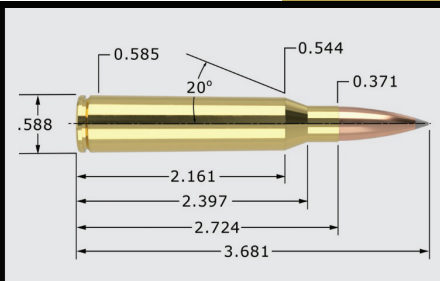

## 338 Lapua Mag - 265 grain

## 338 Cal. (.338")

<b>MAXIMUM SAAMI O.A.C.L.</b>	<b>3.681"</b>	<b>TESTED O.A.C.L.</b>	<b>B.C.</b>	<b>S.D.</b>
AccuBond <sup>®</sup> Long Range	<b>ABLR</b> 265gr. Spitzer	3.681"	0.732	0.331

<b>CASE TYPE:</b>	Nosler	<b>PRIMER TYPE</b>	WLRM
<b>CASE HOLDS:</b>	100.4 Gr. WATER	<b>BARREL Length/Make</b>	24" H-S Prec.
		<b>BARREL Twist</b>	1-10"

<b>POWDER TYPE</b>	<b>POWDER CHG. GRS.</b>	<b>MUZZLE VEL. F.P.S.</b>	<b>LOAD DENSITY (VOLUME)</b>
<b>H4831SC</b>	88.0 MAX.	2767	91%
	86.0 *	2697	89%
	84.0	2627	87%
<b>IMR 7828</b>	89.0 MAX.	2786	94%
	87.0 *	2751	92%
	85.0	2716	90%
<b>IMR 7977</b>	90.0 MAX.	2796	96%
	88.0 *	2712	94%
	86.0	2628	92%
<b>H1000</b>	93.0 MAX.	2825	98%
	91.0 *	2754	96%
	89.0	2684	94%
<b>Norma MRP</b>	88.0 MAX.	2834	96%
	86.0 *	2744	94%
	84.0	2655	92%
<b>Retumbo</b>	95.0 MAX.	2863	** 102%
	93.0	2810	100%
	91.0 *	2758	97%
<b>MAGPRO</b>	94.5 MAX.	2864	97%
	92.5	2796	95%
	90.5 *	2728	93%
<b>RL26</b>	90.0 MAX.	2879	91%
	88.0	2802	89%
	86.0 *	2726	87%
<b>RL33</b>	104.5 MAX.	2923	** 106%
	102.5	2872	** 104%
	100.5 *	2821	** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load