


Cartridge

338 Rem Ultra Mag - 200/210 grain

Version 9.0

NOSLER[®]

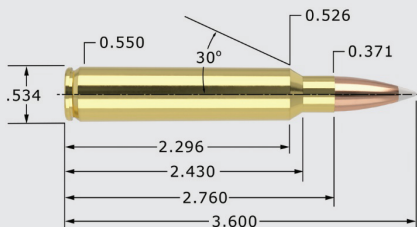

338 Rem Ultra Mag - 200/210 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond [®]	AB	200gr. Spitzer	3.575"	0.414	0.250
CT [®] Ballistic Silvertip [®]	BST	200gr. Spitzer	3.575"	0.414	0.250
Expansion Tip [®]	ET	200gr. Spitzer	3.520"	0.425	0.250
Due to internal construction differences, always begin with starting loads when using Expansion Tip [®] products.					
Partition [®]	PT	210gr. Spitzer	3.550"	0.400	0.263

CASE TYPE:	Remington	PRIMER TYPE	Fed 215
CASE HOLDS:	102.9 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Hybrid 100V	84.0 MAX. 3150		84%
	82.0 * 3100		82%
	80.0 3050		80%
H4831SC Most Accurate Powder Tested	91.0 MAX. 3173		92%
	89.0 * 3058		90%
	87.0 2943		88%
H4350	86.0 MAX. 3174		88%
	84.0 * 3107		86%
	82.0 3041		84%
IMR 4831	89.0 MAX. 3213		93%
	87.0 * 3140		90%
	85.0 3068		88%
H1000	102.0 * MAX. 3225		** 105%
	100.0 3156		** 103%
	98.0 3086		** 101%
RL22	93.0 * MAX. 3232		98%
	91.0 3162		96%
	89.0 3092		94%
IMR 7828	95.0 * MAX. 3271		98%
	93.0 3188		96%
	91.0 3106		94%
IMR 4350	89.0 * MAX. 3290		93%
	87.0 3188		90%
	85.0 3086		88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load