


Cartridge

338 Rem Ultra Mag - 225 grain

Version 9.0

NOSLER®

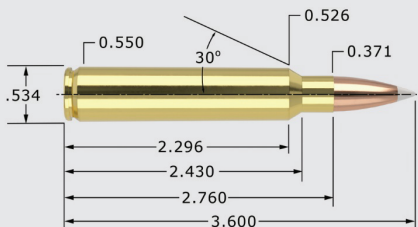

338 Rem Ultra Mag - 225 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	225gr. Spitzer	3.575"	0.550	0.281
Expansion Tip®	ET	225gr. Spitzer	3.575"	0.611	0.281
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	225gr. Spitzer	3.550"	0.454	0.281
CASE TYPE:	Remington	PRIMER TYPE	Fed 215		
CASE HOLDS:	101.0 Gr. WATER	BARREL Length/Make	26" Wiseman		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Retumbo	102.0 MAX. 3090		**	109%	
	100.0 * 2959		**	106%	
	98.0 2828		**	104%	
H4831SC	90.5 MAX. 3094			93%	
	88.5 3052			91%	
	86.5 * 3009			89%	
IMR 4350	86.0 MAX. 3121			91%	
	84.0 3064			89%	
	82.0 * 3008			87%	
H1000	100.0 MAX. 3124		**	105%	
	98.0 3072		**	103%	
	96.0 * 3019		**	101%	
IMR 7828	93.0 * MAX. 3150			98%	
	91.0 3080			96%	
	89.0 3011			94%	
IMR 4831	89.0 * MAX. 3157			94%	
	87.0 3076			92%	
	85.0 2996			90%	
RL22	91.0 * MAX. 3160			98%	
Most Accurate Powder Tested	89.0 3115			96%	
	87.0 3070			94%	
RL25	98.0 MAX. 3227		**	105%	
	96.0 * 3179		**	103%	
	94.0 3131		**	101%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load