


Cartridge

338 Rem Ultra Mag - 250 grain

Version 9.0

NOSLER®

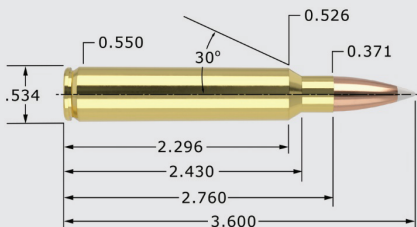

338 Rem Ultra Mag - 250 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	250gr. Spitzer	3.575"	0.575	0.313
Expansion Tip®	ET	250gr. Spitzer	3.575"	0.627	0.313
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	250gr. Spitzer	3.550"	0.473	0.313
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215		
CASE HOLDS:	99.1 Gr. WATER	BARREL Length/Make	26" Wiseman		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4831SC	83.5 * MAX.	2738	88%		
	81.5	2673	86%		
	79.5	2608	84%		
Retumbo	93.0 MAX.	2861	** 101%		
	91.0 *	2802	99%		
	89.0	2744	97%		
IMR 4350	79.0 * MAX.	2871	85%		
	77.0	2821	83%		
	75.0	2770	81%		
RL22	84.0 MAX.	2918	92%		
	82.0 *	2878	90%		
	80.0	2838	88%		
IMR 4831	84.5 MAX.	2941	91%		
	82.5 *	2902	89%		
	80.5	2863	87%		
N560	84.5 MAX.	2948	95%		
	82.5	2903	92%		
	80.5 *	2858	90%		
IMR 7828	87.0 MAX.	2953	93%		
	85.0	2903	91%		
	83.0 *	2853	89%		
RL25	91.0 * MAX.	2986	100%		
Most Accurate	89.0	2927	98%		
Powder Tested	87.0	2868	95%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load