


# Cartridge

## 338 Rem Ultra Mag - 265 grain

Version 9.0

# NOSLER®

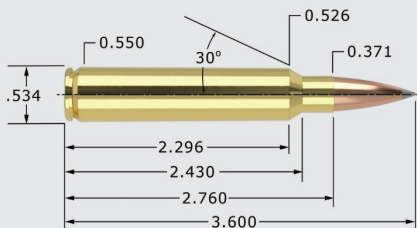

## 338 Rem Ultra Mag - 265 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range		<b>ABLR</b> 265gr. Spitzer	3.600"	0.732	0.331
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	91.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4831</b> Most Accurate Powder Tested	79.5 * MAX.	2769	93%		
	77.5	2688	91%		
	75.5	2607	89%		
<b>IMR 7977</b>	87.5 MAX.	2781	**	103%	
	85.5 *	2737	**	101%	
	83.5	2693		99%	
<b>RL23</b>	83.5 MAX.	2795	**	102%	
	81.5 *	2736		100%	
	79.5	2677		97%	
<b>H1000</b>	90.0 MAX.	2817	**	105%	
	88.0 *	2749	**	102%	
	86.0	2681		100%	
<b>RL22</b>	85.5 MAX.	2818	**	102%	
	83.5 *	2775		100%	
	81.5	2732		97%	
<b>IMR 7828</b>	86.5 MAX.	2845	**	101%	
	84.5 *	2790		99%	
	82.5	2735		96%	
<b>RL26</b>	87.5 * MAX.	2852		98%	
	85.5	2790		96%	
	83.5	2728		94%	
<b>RL25</b>	92.0 MAX.	2869	**	110%	
	90.0 *	2810	**	108%	
	88.0	2751	**	105%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load