


Cartridge

338 Rem Ultra Mag - 300 grain

Version 9.0

NOSLER®

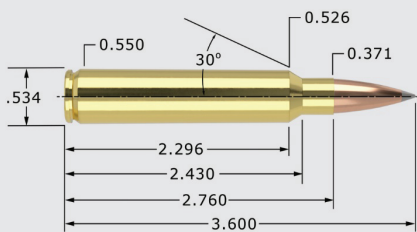

338 Rem Ultra Mag - 300 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond®	AB	300gr. Spitzer	3.590"	0.720	0.375
AccuBond® Long Range	ABLR	300gr. Spitzer	3.670"	0.785	0.375
Custom Competition®	CC	300gr. HPBT	3.590"	0.800	0.375
Reduced Drag Factor™	RDF	300gr. HPBT	3.670"	0.826	0.375

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	91.0 Gr. WATER	BARREL Length/Make	24" H- S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7828 SSC	85.0 MAX. 2606		96%
	83.0 2508		94%
	81.0 * 2410		92%
H1000 Most Accurate Powder Tested	86.0 MAX. 2606		100%
	84.0 * 2544		98%
	82.0 2483		95%
RL25	87.0 MAX. 2607		** 104%
	85.0 * 2549		** 102%
	83.0 2492		99%
PP 4000-MR	78.0 MAX. 2613		90%
	76.0 2551		88%
	74.0 * 2488		86%
N560	84.0 MAX. 2626		** 103%
	82.0 * 2574		100%
	80.0 2523		98%
IMR 7977	87.0 MAX. 2635		** 103%
	85.0 * 2580		100%
	83.0 2525		98%
Retumbo	91.5 MAX. 2640		** 108%
	89.5 * 2586		** 106%
	87.5 2531		** 103%
Magnum	90.0 MAX. 2646		100%
	88.0 2596		98%
	86.0 * 2547		96%
Norma MRP	83.0 MAX. 2648		100%
	81.0 * 2578		98%
	79.0 2508		95%
RL26	84.5 MAX. 2655		95%
	82.5 * 2581		93%
	80.5 2507		90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load