


Cartridge

338 Win Mag - 180 grain

Version 9.0

NOSLER®

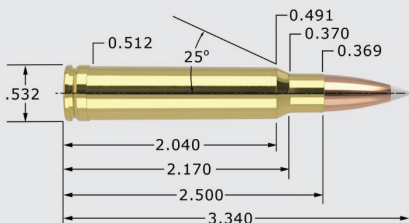

338 Win Mag - 180 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®		AB 180gr. Spitzer	3.330"	0.372	0.225
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215		
CASE HOLDS:	78.6 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4831SC	78.0 * MAX.	3053		**	103%
		2974		**	101%
		2896			98%
RL19	78.0 MAX.	3127		**	108%
	76.0 *	3044		**	105%
	74.0	2961		**	102%
N150 Most Accurate Powder Tested	67.0 * MAX.	3149		**	100%
	65.0	3076			97%
	63.0	3002			94%
H414	74.0 * MAX.	3161			98%
	72.0	3083			95%
	70.0	3005			93%
W760	73.0 * MAX.	3179			97%
	71.0	3105			95%
	69.0	3032			92%
RL15	68.0 * MAX.	3193			90%
	66.0	3107			87%
	64.0	3021			85%
IMR 4350	75.0 * MAX.	3260		**	102%
	73.0	3168			99%
	71.0	3075			97%
H4350	76.0 MAX.	3280		**	102%
	74.0 *	3195			100%
	72.0	3111			97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load