


Cartridge

338 Win Mag - 200/210 grain

Version 9.0

NOSLER®

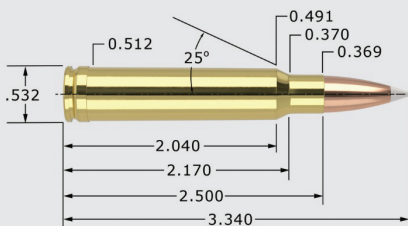

338 Win Mag - 200/210 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	200gr. Spitzer	3.330"	0.414	0.250
CT® Ballistic Silvertip®	BST	200gr. Spitzer	3.330"	0.414	0.250
Expansion Tip®	ET	200gr. Spitzer	3.280"	0.425	0.250
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	210gr. Spitzer	3.330"	0.400	0.263

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	76.8 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4831	75.0 MAX.	2872	** 104%
		2777	** 102%
	71.0 *	2682	99%
RL17	70.0 * MAX.	2877	94%
		2794	92%
		2711	89%
IMR 4350	73.0 MAX.	2902	** 102%
		2827	99%
	69.0 *	2752	96%
H414	71.0 * MAX.	2905	96%
		2829	94%
		2753	91%
N160	74.0 * MAX.	2915	** 107%
		2831	** 104%
		2748	** 101%
RL15	65.5 MAX.	2946	89%
		2840	86%
	61.5 *	2734	83%
W760	71.5 MAX.	2985	97%
		2902	95%
	67.5 *	2819	92%
RL19	76.0 MAX.	3020	** 108%
Most Accurate	74.0	2940	** 105%
Powder Tested	72.0 *	2860	** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load