


# Cartridge

## 338 Win Mag - 225 grain

Version 9.0

# NOSLER®

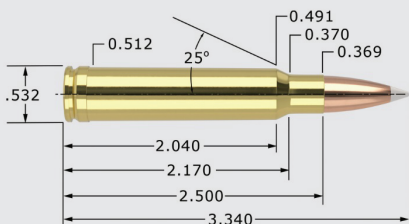

## 338 Win Mag - 225 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	225gr. Spitzer	3.330"	0.550	0.281
Expansion Tip®	<b>ET</b>	225gr. Spitzer	3.280"	0.611	0.281
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	225gr. Spitzer	3.330"	0.454	0.281

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	76.4 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4451</b>	63.5 * MAX. 2643		88%
	61.5 2570		86%
	59.5 2498		83%
<b>H414</b>	67.5 MAX. 2678		92%
	65.5 2592		89%
	63.5 * 2507		87%
<b>AA 4350</b>	67.5 MAX. 2716		99%
	65.5 2614		96%
	63.5 * 2511		93%
<b>RL19</b>	74.0 * MAX. 2784		** 105%
	Most Accurate 72.0 2712		** 102%
	Powder Tested 70.0 2641		100%
<b>IMR 4831</b>	71.0 * MAX. 2807		99%
	69.0 2725		97%
	67.0 2643		94%
<b>H4831SC</b>	75.0 MAX. 2817		** 102%
	73.0 * 2758		100%
	71.0 2700		97%
<b>N160</b>	73.0 MAX. 2833		** 106%
	71.0 2766		** 103%
	69.0 * 2699		** 100%
<b>IMR 4350</b>	71.5 * MAX. 2882		100%
	69.5 2808		97%
	67.5 2733		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load