


Cartridge

338 Win Mag - 250 grain

Version 9.0

NOSLER®

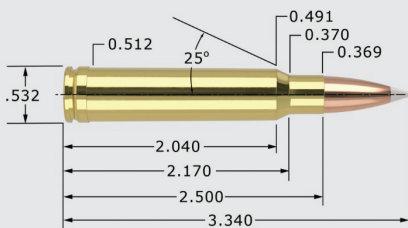

338 Win Mag - 250 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	250gr. Spitzer	3.330"	0.575	0.313
Expansion Tip®	ET	250gr. Spitzer	3.280"	0.627	0.313
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	250gr. Spitzer	3.330"	0.473	0.313

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	73.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4831	69.0 MAX.	2533	** 101%
	67.0	2458	98%
	65.0 *	2382	95%
N165	74.5 * MAX.	2678	** 113%
	72.5	2607	** 110%
	70.5	2535	** 107%
IMR 7828	75.0 MAX.	2680	** 109%
	73.0	2610	** 106%
	71.0 *	2540	** 103%
IMR 4350	68.0 MAX.	2690	100%
	66.0	2600	97%
	64.0 *	2510	94%
RL19	73.0 MAX.	2737	** 109%
	71.0	2664	** 106%
	69.0 *	2591	** 103%
RL22	75.0 MAX.	2745	** 112%
	73.0	2672	** 109%
	71.0 *	2598	** 106%
H4831	71.5 MAX.	2780	** 102%
Most Accurate	69.5	2710	99%
Powder Tested	67.5 *	2640	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load