


Cartridge

338 Win Mag - 265 grain

Version 9.0

NOSLER®

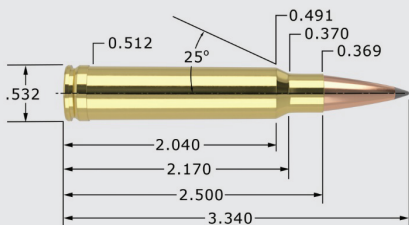

338 Win Mag - 265 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 265gr. Spitzer	3.340"	0.732	0.331

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	74.3 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4831	67.0 MAX. 2620		96%
	65.0 * 2553		94%
	63.0 2486		91%
H4831	69.0 MAX. 2631		97%
	67.0 * 2545		94%
	65.0 2459		91%
IMR 4350 Most Accurate Powder Tested	66.0 MAX. 2649		95%
	64.0 * 2598		92%
	62.0 2547		89%
IMR 7977	76.0 MAX. 2650		** 110%
	74.0 * 2592		** 107%
	72.0 2534		** 104%
IMR 7828	72.0 * MAX. 2681		** 103%
	70.0 2624		** 100%
	68.0 2567		97%
RL22	74.0 * MAX. 2714		** 108%
	72.0 2662		** 105%
	70.0 2610		** 102%
RL19	75.0 MAX. 2740		** 110%
	73.0 2687		** 107%
	71.0 * 2633		** 104%
Norma MRP	75.0 MAX. 2745		** 111%
	73.0 * 2681		** 108%
	71.0 2617		** 105%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load