


# Cartridge

## 338 Win Mag - 300 grain

Version 9.0

# NOSLER®

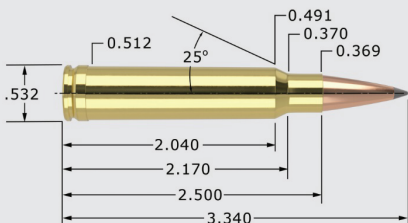

## 338 Win Mag - 300 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	300gr. Spitzer	3.330"	0.720	0.375
AccuBond® Long Range	<b>ABLR</b>	300gr. Spitzer	3.410"	0.785	0.375
Custom Competition®	<b>CC</b>	300gr. HPBT	3.330"	0.800	0.375
Reduced Drag Factor™	<b>RDF</b>	300gr. HPBT	3.410"	0.826	0.375

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	70.3 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Hybrid 100V</b>	60.5 MAX. 2337		89%
	58.5 * 2266		86%
	56.5 2195		83%
<b>IMR 4350</b>	61.0 MAX. 2341		93%
	59.0 * 2273		90%
	57.0 2205		87%
<b>IMR 7828 SSC</b>	68.0 MAX. 2342		100%
	Most Accurate 66.0 2298		97%
	Powder Tested 64.0 * 2255		94%
<b>RL25</b>	71.0 MAX. 2344		** 110%
	69.0 * 2267		** 107%
	67.0 2191		** 104%
<b>H1000</b>	70.0 MAX. 2372		** 105%
	68.0 * 2321		** 102%
	66.0 2271		99%
<b>H4831</b>	67.0 MAX. 2393		99%
	65.0 * 2341		96%
	63.0 2290		93%
<b>N560</b>	68.5 MAX. 2394		** 108%
	66.5 2342		** 105%
	64.5 * 2291		** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load