


Cartridge

340 Wby Mag - 180 grain

Version 9.0

NOSLER®

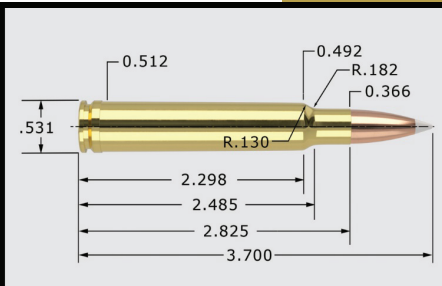

340 Wby Mag - 180 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.700"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 180gr. Spitzer	3.575"	0.372	0.225

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	94.6 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N160	87.0 * MAX.	3266	** 102%
	85.0	3176	100%
	83.0	3086	97%
RL22	90.0 * MAX.	3267	** 103%
	88.0	3171	** 101%
	86.0	3076	99%
IMR 7828	93.0 MAX.	3267	** 105%
	91.0 *	3235	** 102%
	89.0	3203	100%
RL19	88.0 * MAX.	3272	** 101%
	86.0	3172	99%
	84.0	3072	97%
IMR 4350	87.5 MAX.	3360	99%
Most Accurate	85.5 *	3320	97%
Powder Tested	83.5	3279	94%
IMR 4831	88.0 * MAX.	3364	99%
	86.0	3291	97%
	84.0	3218	95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load