


Cartridge

340 Wby Mag - 200/210 grain

Version 9.0

NOSLER®

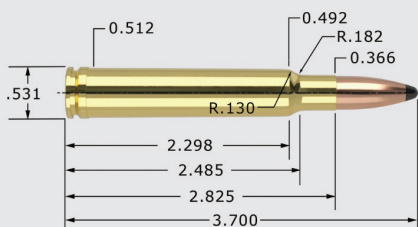

340 Wby Mag - 200/210 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.700"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	200gr. Spitzer	3.580"	0.414	0.250
CT® Ballistic Silvertip®	BST	200gr. Spitzer	3.580"	0.414	0.250
Expansion Tip®	ET	200gr. Spitzer	3.550"	0.425	0.250
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	210gr. Spitzer	3.580"	0.400	0.263

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	94.0 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
IMR 4320	69.0 MAX.	2912	80%	
	67.0	2817	77%	
	65.0 *	2722	75%	
N165	87.0 * MAX.	2977	** 103%	
	85.0	2905	100%	
	83.0	2834	98%	
H4831	87.0 MAX.	3036	96%	
	85.0	2973	94%	
	83.0 *	2909	92%	
RL19	85.5 MAX.	3063	99%	
	Most Accurate	83.5	2983	97%
	Powder Tested	81.5 *	2904	94%
IMR 4831	85.5 MAX.	3140	97%	
	83.5	3050	95%	
	81.5 *	2960	93%	
IMR 4350	83.5 MAX.	3223	95%	
	81.5	3109	93%	
	79.5 *	2995	90%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load