


Cartridge

340 Wby Mag - 225 grain

Version 9.0

NOSLER®

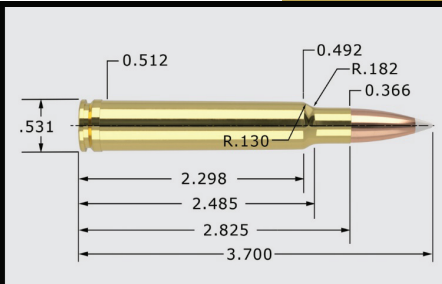

340 Wby Mag - 225 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.700"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	225gr. Spitzer	3.580"	0.550	0.281
Expansion Tip®	ET	225gr. Spitzer	3.580"	0.611	0.281
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	225gr. Spitzer	3.580"	0.454	0.281

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	92.5 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
IMR 4350	79.0 MAX.	2810	91%	
	77.0	2697	89%	
	75.0 *	2584	87%	
H4831	85.5 MAX.	2926	96%	
	83.5	2847	94%	
	81.5 *	2768	92%	
RL19	83.0 * MAX.	2942	98%	
	81.0	2866	95%	
	79.0	2790	93%	
IMR 7828	87.5 * MAX.	2942	** 101%	
	Most Accurate	85.5	2871	98%
	Powder Tested	83.5	2800	96%
N165	86.0 MAX.	2953	** 103%	
	84.0	2884	** 101%	
	82.0 *	2816	98%	
RL22	86.0 MAX.	2976	** 101%	
	84.0	2889	99%	
	82.0 *	2802	96%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load