


Cartridge

340 Wby Mag - 250 grain

Version 9.0

NOSLER®

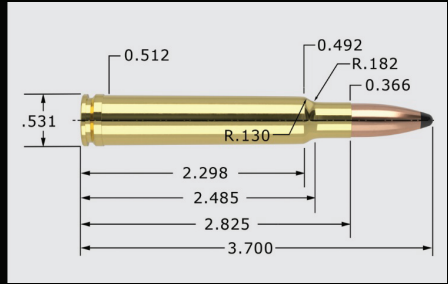

340 Wby Mag - 250 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.700"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 250gr. Spitzer	3.580"	0.575	0.313
Expansion Tip®	ET 250gr. Spitzer	3.580"	0.627	0.313
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	PT 250gr. Spitzer	3.580"	0.473	0.313

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	89.0 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	66.0 MAX. 2680	[Bar]	81%
	64.0 2590	[Bar]	78%
	62.0 * 2500	[Bar]	76%
IMR 4831	77.5 MAX. 2700	[Bar]	93%
	75.5 2620	[Bar]	91%
	73.5 * 2540	[Bar]	88%
IMR 4350	76.0 MAX. 2732	[Bar]	91%
	74.0 2647	[Bar]	89%
	72.0 * 2562	[Bar]	87%
N165	85.0 * MAX. 2773	[Bar]	** 106%
	83.0 2705	[Bar]	** 104%
	81.0 2637	[Bar]	** 101%
RL19	81.0 MAX. 2801	[Bar]	99%
	79.0 2736	[Bar]	96%
	77.0 * 2670	[Bar]	94%
IMR 7828	86.0 * MAX. 2818	[Bar]	** 103%
	Most Accurate 84.0 2733	[Bar]	** 100%
	Powder Tested 82.0 2648	[Bar]	98%
RL22	83.0 * MAX. 2829	[Bar]	** 101%
	81.0 2765	[Bar]	99%
	79.0 2700	[Bar]	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load