


Cartridge

340 Wby Mag - 265 grain

Version 9.0

NOSLER[®]

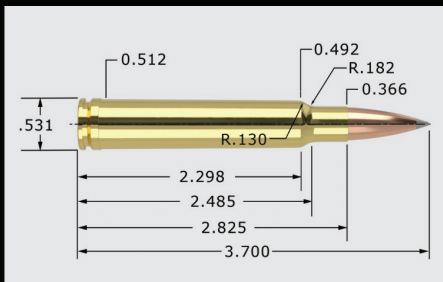

340 Wby Mag - 265 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.700"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond [®] Long Range	ABLR 265gr. Spitzer	3.700"	0.732	0.331

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	88.0 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	67.0 MAX. 2627	[Bar]	83%
	65.0 2562	[Bar]	80%
	63.0 2497	[Bar]	78%
IMR 4350	79.0 MAX. 2801	[Bar]	96%
	Most Accurate 77.0 2733	[Bar]	94%
	Powder Tested 75.0 2665	[Bar]	91%
IMR 4831	78.5 MAX. 2844	[Bar]	95%
	76.5 2782	[Bar]	93%
	74.5 2721	[Bar]	91%
RL19	83.0 MAX. 2849	[Bar]	** 103%
	81.0 2771	[Bar]	100%
	79.0 2694	[Bar]	98%
IMR 7828	84.5 MAX. 2892	[Bar]	** 102%
	82.5 2818	[Bar]	100%
	80.5 2743	[Bar]	97%
RL22	85.0 MAX. 2907	[Bar]	** 105%
	83.0 2840	[Bar]	** 103%
	81.0 2774	[Bar]	100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load