


# Cartridge

## 340 Wby Mag - 300 grain

Version 9.0

# NOSLER®

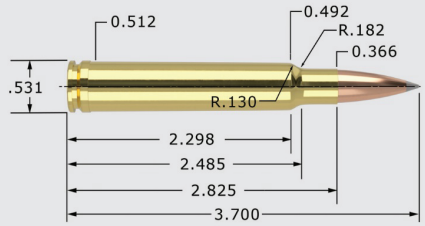

## 340 Wby Mag - 300 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.700"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b> 300gr. Spitzer	3.620"	0.720	0.375
AccuBond® Long Range	<b>ABLR</b> 300gr. Spitzer	3.735"	0.785	0.375
Custom Competition®	<b>CC</b> 300gr. HPBT	3.620"	0.800	0.375
Reduced Drag Factor™	<b>RDF</b> 300gr. HPBT	3.735"	0.826	0.375

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	82.5 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 7828 SSC</b>	79.5 * MAX. 2570		99%
	Most Accurate 77.5 2524		97%
	Powder Tested 75.5 2478		94%
<b>PP 4000-MR</b>	76.0 MAX. 2575		97%
	74.0 2517		94%
	72.0 * 2458		92%
<b>RL22</b>	79.5 MAX. 2578		** 105%
	77.5 * 2510		** 102%
	75.5 2443		99%
<b>H4831</b>	78.5 MAX. 2595		99%
	76.5 * 2534		97%
	74.5 2472		94%
<b>N165</b>	82.0 MAX. 2605		** 110%
	80.0 2559		** 108%
	78.0 * 2512		** 105%
<b>MAGPRO</b>	88.0 MAX. 2650		** 110%
	86.0 2576		** 107%
	84.0 * 2501		** 105%
<b>Norma MRP</b>	82.0 MAX. 2654		** 109%
	80.0 2614		** 107%
	78.0 * 2575		** 104%
<b>IMR 4350</b>	75.0 MAX. 2727		97%
	73.0 2669		95%
	71.0 * 2612		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load