


Cartridge

35 Whelen - 225 grain

Version 9.0

NOSLER®

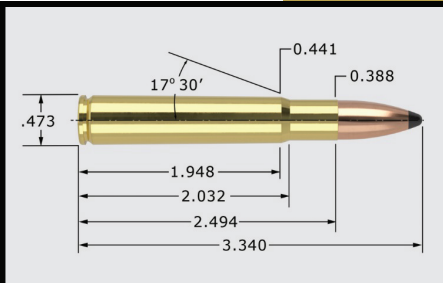

35 Whelen - 225 grain

35 Cal. (.358")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond®	AB	225gr. Spitzer	3.330"	0.430	0.251
Partition®	PT	225gr. Spitzer	3.300"	0.421	0.251

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	66.4 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2015	49.0 MAX.	2462	84%
	47.0	2390	80%
	45.0 *	2318	77%
AA 2495 Most Accurate Powder Tested	53.0 * MAX.	2574	91%
	51.0	2499	87%
	49.0	2425	84%
H380	61.0 MAX.	2621	97%
	59.0	2574	94%
	57.0 *	2527	90%
IMR 8208 XBR	55.0 MAX.	2662	91%
	53.0 *	2591	88%
	51.0	2521	84%
RL10x	50.0 MAX.	2663	85%
	48.0	2562	81%
	46.0 *	2460	78%
H4895	57.0 * MAX.	2753	94%
	55.0	2672	91%
	53.0	2592	88%
W748	61.0 * MAX.	2774	96%
	59.0	2719	93%
	57.0	2663	89%
RL15	59.0 * MAX.	2786	93%
	57.0	2740	89%
	55.0	2695	86%
Varget	60.5 * MAX.	2800	99%
	58.5	2742	95%
	56.5	2685	92%
IMR 4064	58.0 * MAX.	2806	97%
	56.0	2737	93%
	54.0	2669	90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load