


Cartridge

375 H&H Mag - 260 grain

Version 9.0

NOSLER®

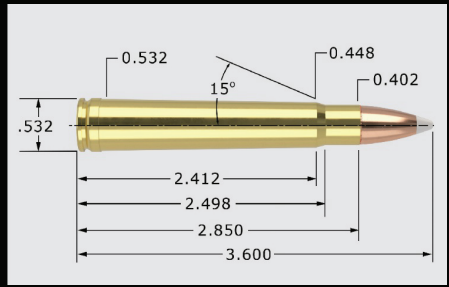

375 H&H Mag - 260 grain

375 Cal. (.375")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	260gr. Spitzer	3.575"	0.473	0.264
Expansion Tip®	ET	260gr. Spitzer	3.575"	0.490	0.264
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	260gr. Spitzer	3.495"	0.314	0.264
Solid®	SD	260gr. Solid	3.590"	0.254	0.264

CASE TYPE:	Nosler	PRIMER TYPE	Rem. 9 1/2M
CASE HOLDS:	83.4 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL19	80.0 * MAX. 2604		** 104%
	78.0 2537		** 102%
	76.0 2470		99%
N160	81.0 * MAX. 2681		** 108%
	79.0 2621		** 105%
	77.0 2561		** 103%
IMR 4350	78.5 MAX. 2707		** 101%
	76.5 2639		98%
	74.5 * 2570		96%
IMR 4064	70.0 MAX. 2721		93%
	68.0 2617		90%
	66.0 * 2512		87%
IMR 4831	80.5 MAX. 2734		** 103%
	78.5 2669		** 101%
	76.5 * 2605		98%
W760	78.5 MAX. 2747		99%
	76.5 2690		96%
	74.5 * 2633		94%
RL15	73.0 MAX. 2793		91%
Most Accurate	71.0 2721		89%
Powder Tested	69.0 * 2648		86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load