


# Cartridge

## 375 H&H Mag - 300 grain

Version 9.0

# NOSLER®

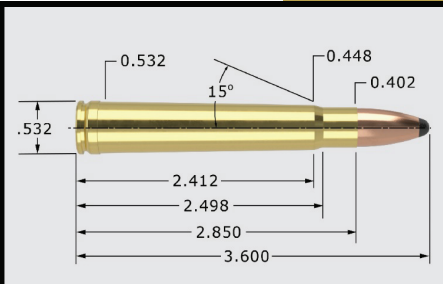

## 375 H&H Mag - 300 grain

## 375 Cal. (.375")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b> 300gr. Spitzer	3.575"	0.485	0.305
Partition®	<b>PT</b> 300gr. Spitzer	3.550"	0.398	0.305
Solid®	<b>SD</b> 300gr. Solid	3.570"	0.300	0.305

CASE TYPE:	Nosler	PRIMER TYPE	Rem. 9 1/2M
CASE HOLDS:	78.5 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4350</b>	75.0 MAX. 2452		** 102%
	73.0 2367		99%
	71.0 * 2282		97%
<b>N160</b>	78.5 * MAX. 2462		** 111%
	76.5 2406		** 108%
	74.5 2350		** 105%
<b>RL19</b> Most Accurate Powder Tested	79.0 * MAX. 2470		** 109%
	77.0 2410		** 107%
	75.0 2350		** 104%
<b>RL15</b>	68.0 MAX. 2490		90%
	66.0 2425		88%
	64.0 * 2361		85%
<b>IMR 4831</b>	78.0 MAX. 2512		** 106%
	76.0 2405		** 104%
	74.0 * 2299		** 101%
<b>H4895</b>	67.5 MAX. 2533		94%
	65.5 2463		92%
	63.5 * 2393		89%
<b>W760</b>	78.0 * MAX. 2602		** 104%
	76.0 2560		** 101%
	74.0 2519		99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load