


Cartridge

375 Rem Ultra Mag - 260 grain

Version 9.0

NOSLER®

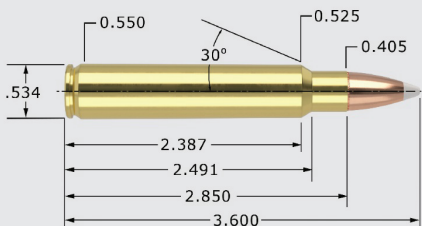

375 Rem Ultra Mag - 260 grain

375 Cal. (.375")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	260gr. Spitzer	3.575"	0.473	0.264
Expansion Tip®	ET	260gr. Spitzer	3.575"	0.490	0.264
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	260gr. Spitzer	3.495"	0.314	0.264
Solid®	SD	260gr. Solid	3.590"	0.254	0.264

CASE TYPE:	Remington	PRIMER TYPE	Rem. 9 1/2M
CASE HOLDS:	105.2 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-12"
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H1000	107.0 * MAX. 2942		** 108%
	105.0 2892		** 106%
	103.0 2842		** 104%
H4831SC	101.0 MAX. 3017		100%
	Most Accurate 99.0 2962		98%
	Powder Tested 97.0 * 2907		96%
IMR 7828	102.0 * MAX. 3019		** 103%
	100.0 2974		** 101%
	98.0 2929		99%
IMR 4350	96.0 * MAX. 3028		98%
	94.0 2972		96%
	92.0 2915		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load