
Cartridge

375 Rem Ultra Mag - 300 grain

Version 9.0

101%



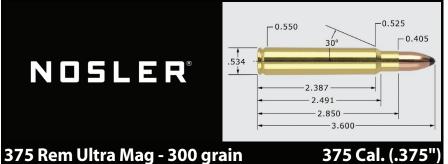

MAXIMUM SAAMI O.A.C.L.			3.600"	TESTED O.A.C.L.	В	.C.	S.D.
AccuBond®		AB	300gr. Spitzer	3.575"	0	.485	0.305
Partition® PT		300gr. Spitzer	3.550"	0	.398	0.305	
Solid®		300gr. Solid	3.570"	0	.300	0.305	
CASE TYPE: Remington		PRIMER TYPE			Rem. 9 1/2M		
CASE HOLDS:	HOLDS: 100.8 Gr. WATER		BARREL Length/Make			26" Lilja	
			BARREL Twist			1-12"	
POWDER CHG.		MUZZLE VEL.		LOAD DENSITY			
TYPE	GRS.		F.P.S.			(VOLUME)	
H1000	105.0 * MAX.	2792				1	10%
Most Accurate	103.0	2747				1	08%
Powder Tested	101.0	2701			**	1	06%
H4831SC	97.0 * MAX.	2822			•	1	00%
	95.0	2764				9	98%
	93.0	2707				9	96%
IMR 4350	94.0 MAX.	2850				1	00%
	92.0 *	2805				9	98%
	90.0	2761				9	95%
IMR 7828	100.0 MAX.	2860			××	1	06%
	98.0 *	2798			××	1	03%

²⁷³⁵ All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

96.0

^{*} Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

^{* =} Most accurate load tested

⁼ Compressed load