


Cartridge

375 Ruger - 260 grain

Version 9.0

NOSLER®

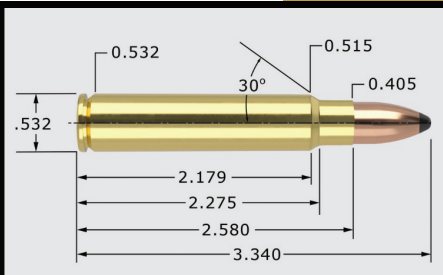

375 Ruger - 260 grain

375 Cal. (.375")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 260gr. Spitzer	3.320"	0.473	0.264
Expansion Tip®	ET 260gr. Spitzer	3.300"	0.490	0.264
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	PT 260gr. Spitzer	3.240"	0.314	0.264
Solid®	SD 260gr. Solid	3.335"	0.254	0.264

CASE TYPE:	Hornady	PRIMER TYPE	WLRM
CASE HOLDS:	85.5 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H380	81.0 * MAX. 2862	[Bar]	100%
	79.0 2783	[Bar]	97%
	77.0 2705	[Bar]	95%
W760	79.0 * MAX. 2876	[Bar]	97%
	77.0 2824	[Bar]	94%
	75.0 2771	[Bar]	92%
RL15	76.0 MAX. 2880	[Bar]	93%
	74.0 2809	[Bar]	90%
	72.0 * 2739	[Bar]	88%
Hybrid 100V Most Accurate Powder Tested	81.0 * MAX. 2885	[Bar]	98%
	79.0 2818	[Bar]	95%
	77.0 2751	[Bar]	93%
RL17	81.5 MAX. 2927	[Bar]	99%
	79.5 2847	[Bar]	96%
	77.5 * 2767	[Bar]	94%
Big Game	82.5 MAX. 2927	[Bar]	98%
	80.5 * 2857	[Bar]	96%
	78.5 2786	[Bar]	94%
Hunter	88.0 MAX. 2941	[Bar]	** 106%
	86.0 2871	[Bar]	** 104%
	84.0 * 2801	[Bar]	** 101%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load