


# Cartridge

## 416 Rigby - 400 grain

Version 9.0

# NOSLER<sup>®</sup>

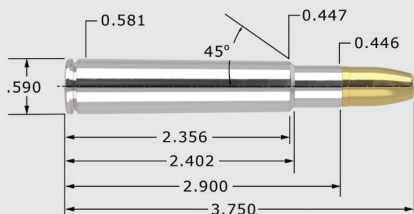

## 416 Rigby - 400 grain

## 416 Cal. (.416")

MAXIMUM SAAMI O.A.C.L.		3.750"	TESTED O.A.C.L.	B.C.	S.D.
Partition <sup>®</sup>	<b>PT</b>	400gr. Spitzer	3.630"	0.390	0.330
Solid <sup>®</sup>	<b>SD</b>	400gr. Solid	3.655"	0.289	0.330
CASE TYPE:	Norma	PRIMER TYPE	WLRM		
CASE HOLDS:	106.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-14"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4350</b>	92.0 MAX. 2428		93%		
Most Accurate Powder Tested	90.0 2376		91%		
	88.0 * 2325		89%		
<b>IMR 7828 SSC</b>	102.0 * MAX. 2450		99%		
	100.0 2398		97%		
	98.0 2347		95%		
<b>H4831SC</b>	99.0 * MAX. 2462		97%		
	97.0 2427		95%		
	95.0 2392		93%		
<b>RL19</b>	101.0 MAX. 2475		**	104%	
	99.0 * 2435		**	102%	
	97.0 2396		99%		
<b>Hybrid 100V</b>	92.0 MAX. 2488		89%		
	90.0 * 2432		88%		
	88.0 2376		86%		
<b>RL22</b>	104.0 MAX. 2516		**	107%	
	102.0 2469		**	105%	
	100.0 * 2422		**	103%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load