


# Cartridge

## 45 Colt (SAA and replicas) - 250 grain

Version 9.0

# NOSLER®

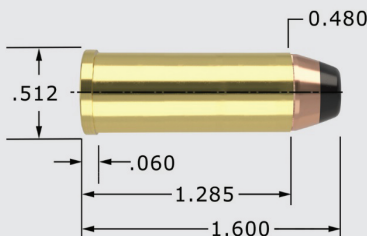

## 45 Colt (SAA and replicas) - 250 grain

## 45 Cal. (.451")

MAXIMUM SAAMI O.A.C.L.		1.600"	TESTED O.A.C.L.	B.C.	S.D.
Sporting Handgun®		<b>SHG</b> 250 gr. JHP	1.590"	0.177	0.176
CASE TYPE:	Winchester	PRIMER TYPE		Rem 2-1/2	
CASE HOLDS:	24.3 Gr. WATER	BARREL Length/Make		7.25" Douglas	
		BARREL Twist		1-16"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>AA #5</b>	9.8 * MAX.	740	42%		
		680	40%		
		620	38%		
<b>HS-6</b>	9.8 * MAX.	742	44%		
		677	42%		
		612	40%		
<b>Hi-Skor 800-X</b>	7.4 * MAX.	794	48%		
		743	45%		
		692	42%		
<b>Blue Dot</b>	11.4 MAX.	800	59%		
		750	56%		
	10.4 *	700	53%		
<b>Herco</b>	8.1 MAX.	802	56%		
		737	53%		
	7.1 *	672	50%		
<b>IMR 4227</b>	17.5 * MAX.	810	86%		
		780	83%		
		750	81%		
<b>Titegroup</b>	6.2 MAX.	819	34%		
Most Accurate	5.7 *	762	31%		
Powder Tested	5.2	705	29%		
<b>AutoComp</b>	8.3 * MAX.	827	40%		
		769	38%		
		710	35%		
<b>CFE Pistol</b>	8.5 MAX.	884	41%		
	8.0 *	832	39%		
		780	36%		
<b>2400</b>	14.8 MAX.	932	69%		
		898	67%		
	13.8 *	865	65%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load