


CARTRIDGE

6.5mm-06 A-Square - 100 grain

Version 8.0

Nosler

UP FRONT

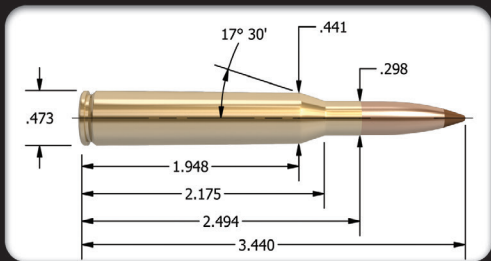

6.5mm-06 A-Square - 100 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.440"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	100gr. Spitzer	3.250"	0.350	0.205
Custom Competition®	100gr. HPBT	3.150"	0.362	0.205
Partition®	100gr. Spitzer	3.250"	0.326	0.205

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	65.7 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350 Most Accurate Powder Tested	55.5 MAX.	3367	89%
	53.5	3229	86%
	51.5 *	3090	83%
IMR 7828	60.0 * MAX.	3413	97%
	58.0	3268	94%
	56.0	3134	91%
RL19	58.0 * MAX.	3420	96%
	56.0	3287	93%
	54.0	3154	89%
Viht N165	60.5 MAX.	3422	** 102%
	58.5	3301	99%
	56.5 *	3179	96%
H4831	60.0 MAX.	3425	95%
	58.0	3309	92%
	56.0 *	3193	89%
W760	53.5 MAX.	3520	85%
	51.5	3428	82%
	49.5 *	3319	79%
H4350	54.0 MAX.	3532	87%
	52.0 *	3447	84%
	50.0	3380	81%
Viht N160	56.0 MAX.	3533	95%
	54.0	3429	91%
	52.0 *	3328	88%
Hunter	57.0 MAX.	3547	91%
	55.0	3451	88%
	53.0 *	3324	85%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load