


CARTRIDGE

6.5mm-06 A-Square - 120 grain

Version 8.0

Nosler

UP FRONT

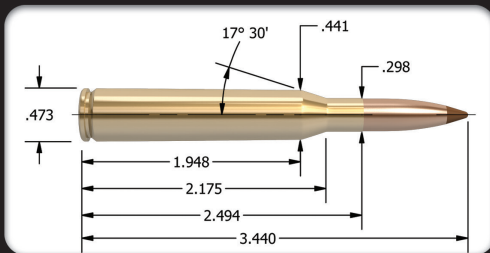

6.5mm-06 A-Square - 120 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.440"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	120gr. Spitzer	3.250"	0.458	0.246
E-Tip®	120gr. Spitzer	3.250"	0.497	0.246

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	63.3 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MAX.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831 Most Accurate Powder Tested	56.5	MAX.	2938	93%
	54.5		2813	90%
	52.5 *		2588	86%
IMR 7828	57.5	* MAX.	3070	97%
	55.5		2920	93%
	53.5		2770	90%
Viht N160	52.0	* MAX.	3118	91%
	50.0		3035	88%
	48.0		2940	84%
RL19	54.0	* MAX.	3144	93%
	52.0		3031	89%
	50.0		2919	86%
H4350	50.0	MAX.	3179	84%
	48.0	*	3105	80%
	46.0		2996	77%
Hunter	53.0	MAX.	3215	88%
	51.0		3122	85%
	49.0	*	3008	81%
IMR 4350	52.5	* MAX.	3248	88%
	50.5		3086	84%
	48.5		2930	81%
Viht N560	55.0	MAX.	3282	97%
	53.0		3170	93%
	51.0	*	3068	90%
RL22	55.5	MAX.	3294	95%
	53.5		3201	92%
	51.5	*	3061	88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load