


CARTRIDGE

6.5mm-06 A-Square - 123/125 grain

Version 8.0

Nosler®

UP FRONT

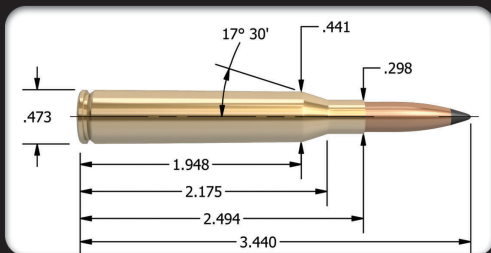

6.5mm-06 A-Square - 123/125 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.440"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	123gr. HPBT	3.250"	0.510	0.252
Partition®	125gr. Spitzer	3.250"	0.449	0.256
CASE TYPE:	Winchester	PRIMER TYPE	WLR	
CASE HOLDS:	64.6 Gr. WATER	BARREL Length/Make	24" Lilja	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4831	50.0 MAX.	3000		82%
	48.0	2942		79%
	46.0 *	2848		76%
Viht N160	47.0 MAX.	3012		81%
	45.0 *	2908		77%
	43.0	2801		74%
Hunter	49.0 MAX.	3048		80%
	47.0	2945		77%
	45.0 *	2849		73%
Viht N165	54.5 MAX.	3049		94%
	52.5	2954		90%
	50.5 *	2859		87%
IMR 7828	53.5 MAX.	3061		88%
	51.5	2970		85%
	49.5 *	2864		82%
RL19 Most Accurate Powder Tested	53.5 MAX.	3070		90%
	51.5	2960		87%
	49.5 *	2850		83%
H4831SC	50.0 MAX.	3078		81%
	48.0	3022		77%
	46.0 *	2961		74%
IMR 4350	48.0 MAX.	3088		79%
	46.0	2982		75%
	44.0 *	2871		72%
RL22	54.5 * MAX.	3110		92%
	52.5	3010		88%
	50.5	2910		85%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load