


CARTRIDGE

6.5mm-06 A-Square - 129/130 grain

Version 8.3

Nosler®

UP FRONT

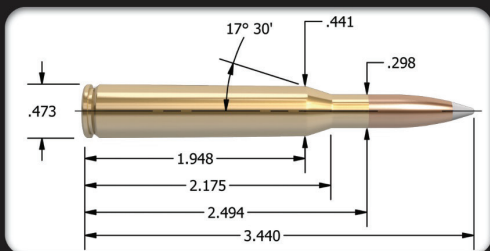

6.5mm-06 A-Square - 129/130 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.440"

TESTED O.A.C.L.

B.C.

S.D.

| | | | | |
|----------------------|----------------|--------|-------|-------|
| AccuBond® Long Range | 129gr. Spitzer | 3.250" | 0.530 | 0.264 |
| AccuBond® | 130gr. Spitzer | 3.250" | 0.488 | 0.266 |
| Reduced Drag Factor™ | 130gr. HPBT | 3.250" | 0.615 | 0.266 |

| | | | |
|-------------|----------------|--------------------|-----------|
| CASE TYPE: | Norma | PRIMER TYPE | Rem 9 1/2 |
| CASE HOLDS: | 60.8 Gr. WATER | BARREL Length/Make | 24" Lilja |
| | | BARREL Twist | 1-9" |

| POWDER TYPE | POWDER CHG. GRS. | | MUZZLE VEL. F.P.S. | LOAD DENSITY (VOLUME) |
|-------------------------------------------------|------------------|------|--------------------|-----------------------|
| Hunter | 49.0 MAX. | 2960 | | 85% |
| | 47.0 * | 2852 | | 81% |
| | 45.0 | 2779 | | 78% |
| Viht N165 | 52.5 MAX. | 3031 | | 96% |
| | 50.5 * | 2924 | | 92% |
| | 48.5 | 2839 | | 89% |
| IMR 4350 | 49.5 MAX. | 3040 | | 87% |
| | 47.5 | 2947 | | 83% |
| | 45.5 * | 2825 | | 80% |
| H4831SC | 52.0 * MAX. | 3058 | | 89% |
| | 50.0 | 2981 | | 86% |
| | 48.0 | 2902 | | 82% |
| IMR 4831 | 50.0 MAX. | 3074 | | 87% |
| | 48.0 | 2959 | | 84% |
| | 46.0 * | 2862 | | 80% |
| IMR 7828 | 52.5 MAX. | 3078 | | 92% |
| | 50.5 * | 2959 | | 88% |
| | 48.5 | 2874 | | 85% |
| RL19 | 52.0 MAX. | 3089 | | 93% |
| | 50.0 | 3013 | | 89% |
| | 48.0 * | 2899 | | 86% |
| RL22 | 53.0 MAX. | 3121 | | 95% |
| | 51.0 | 3040 | | 91% |
| | 49.0 * | 2937 | | 88% |
| Viht N560 Most Accurate Powder Tested | 53.0 MAX. | 3151 | | 97% |
| | 51.0 * | 3024 | | 93% |
| | 49.0 | 2912 | | 90% |

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load