


# CARTRIDGE

6.5mm-06 A-Square - 140/142 grain

Version 8.3

# Nosler

UP FRONT

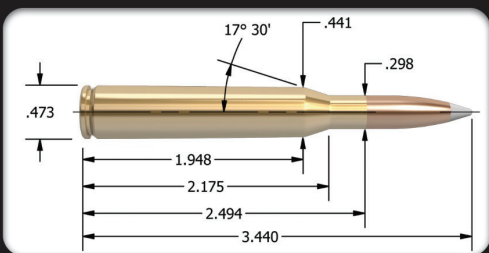

6.5mm-06 A-Square - 140/142 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.440"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	140gr. Spitzer	3.250"	0.509	0.287
Ballistic Tip®	140gr. Spitzer	3.250"	0.509	0.287
Custom Competition®	140gr. HPBT	3.250"	0.529	0.287
Partition®	140gr. Spitzer	3.250"	0.490	0.287
Reduced Drag Factor™	140gr. HPBT	3.250"	0.658	0.287
AccuBond® Long Range*	142gr. Spitzer	3.250	0.625	0.291

\*1-8" twist recommended for the 142gr AccuBond® Long Range

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	62.0 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Viht N160</b>	47.0 MAX.	2773	84%
	45.0	2691	81%
	43.0 *	2608	77%
<b>H4831</b>	49.5 * MAX.	2800	83%
	47.5	2710	80%
	45.5	2620	76%
<b>IMR 4831</b>	48.0 MAX.	2800	82%
	46.0	2720	79%
	44.0 *	2640	75%
<b>H4350</b> Most Accurate Powder Tested	48.5 MAX.	2808	83%
	46.5	2723	79%
	44.5 *	2638	76%
<b>Hunter</b>	47.0 MAX.	2832	80%
	45.0 *	2748	76%
	43.0	2652	73%
<b>RL22</b>	50.5 * MAX.	2860	89%
	48.5	2760	85%
	46.5	2660	82%
<b>IMR 4350</b>	46.5 MAX.	2869	79%
	44.5	2771	76%
	42.5 *	2682	73%
<b>RL19</b>	48.5 MAX.	2902	85%
	46.5 *	2781	82%
	44.5	2712	78%
<b>Viht N165</b>	50.5 * MAX.	2906	91%
	48.5	2811	87%
	46.5	2735	83%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load