


Cartridge

6.5-284 - 100 grain

Version 9.0

NOSLER®

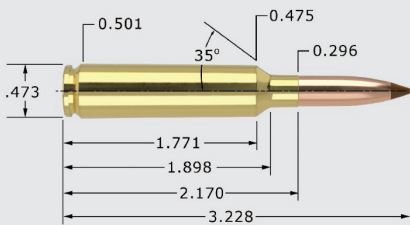

6.5-284 - 100 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.228"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	100gr. Spitzer	2.980"	0.350	0.205
Custom Competition®	CC	100gr. HPBT	2.980"	0.362	0.205
Partition®	PT	100gr. Spitzer	2.980"	0.326	0.205
CASE TYPE:	Nosler		PRIMER TYPE	Fed 210M	
CASE HOLDS:	60.8	Gr. WATER	BARREL Length/Make	26" Wiseman	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL15	48.0	MAX. 3348	82%		
	46.0	3270	79%		
	44.0	3193	75%		
H4831SC	57.5	MAX. 3362	99%		
	55.5	3271	95%		
	53.5	3180	92%		
Varget	48.0	MAX. 3366	85%		
	46.0	3256	82%		
	44.0	3147	78%		
IMR 4350	53.0	MAX. 3376	93%		
	51.0	3266	90%		
	49.0	3156	86%		
W760	52.5	MAX. 3402	90%		
	50.5	3319	87%		
	48.5	3235	84%		
RL19	58.0	MAX. 3437	**	104%	
	56.0	3334		100%	
	54.0	3231		97%	
N160 Most Accurate Powder Tested	57.0	MAX. 3455	**	104%	
	55.0	3397	**	101%	
	53.0	3338		97%	
H4350	55.0	MAX. 3467	96%		
	53.0	3355	92%		
	51.0	3243	89%		
Hunter	57.5	MAX. 3480	97%		
	55.5	3358	94%		
	53.5	3236	91%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load