


Cartridge

6.5-284 - 120 grain

Version 9.0

NOSLER®

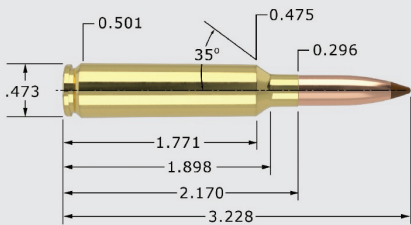

6.5-284 - 120 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	3.228"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip®	BT	120gr. Spitzer	2.980"	0.458	0.246
Expansion Tip®	ET	120gr. Spitzer	2.980"	0.497	0.246

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210M
CASE HOLDS:	59.0 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	54.0 MAX.	3007	95%
	52.0	2900	92%
	50.0 *	2794	88%
RL15	45.0 * MAX.	3013	79%
	43.0	2922	76%
	41.0	2831	72%
Varget	46.0 MAX.	3051	84%
	44.0 *	2956	81%
	42.0	2861	77%
H414	49.5 * MAX.	3064	87%
	47.5	2972	84%
	45.5	2880	80%
W760	49.5 MAX.	3070	88%
	47.5 *	2970	84%
	45.5	2870	81%
IMR 4350	50.5 MAX.	3075	92%
	48.5	2969	88%
	46.5 *	2864	84%
N160	53.0 MAX.	3132	100%
	51.0	3020	96%
	49.0 *	2908	92%
Hunter	53.5 MAX.	3145	93%
	51.5	3039	90%
	49.5 *	2933	86%
RL19	54.5 MAX.	3172	100%
Most Accurate	52.5	3058	97%
Powder Tested	50.5 *	2943	93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load