


# Cartridge

6.5-284 - 123/125 grain

Version 9.0

# NOSLER®

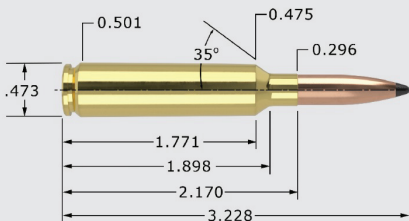

6.5-284 - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.228"	TESTED O.A.C.L.	B.C.	S.D.	
Custom Competition®	<b>CC</b>	123gr. HPBT	2.980"	0.510	0.252	
Partition®	<b>PT</b>	125gr. Spitzer	2.980"	0.449	0.256	
CASE TYPE:	Nosler	PRIMER TYPE	Fed 210M			
CASE HOLDS:	59.7 Gr. WATER	BARREL Length/Make	26" Wiseman			
		BARREL Twist	1-9"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
<b>H4831SC</b>	53.5 * MAX.	3029	93%			
	51.5	2940	90%			
	49.5	2851	86%			
<b>Hunter</b>	52.0 MAX.	3045	90%			
	50.0 *	2964	86%			
	48.0	2882	83%			
<b>IMR 4350</b>	50.0 MAX.	3042	90%			
	48.0	2930	86%			
	46.0 *	2818	82%			
<b>W760</b>	49.0 MAX.	3049	86%			
	47.0	2965	82%			
	45.0 *	2880	79%			
<b>N160</b>	52.0 MAX.	3067	97%			
	50.0	2961	93%			
	48.0 *	2855	89%			
<b>N165</b>	56.5 * MAX.	3082	** 105%			
	Most Accurate	54.5	2964	** 101%		
	Powder Tested	52.5	2846	98%		
<b>IMR 4831</b>	51.5 MAX.	3097	92%			
	49.5	2952	89%			
	47.5 *	2807	85%			
<b>RL19</b>	54.0 * MAX.	3111	98%			
	52.0	3012	95%			
	50.0	2914	91%			
<b>RL22</b>	54.5 MAX.	3114	99%			
	52.5	2999	96%			
	50.5 *	2885	92%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load