


# Cartridge

6.5-284 - 129/130 grain

Version 9.0

# NOSLER®

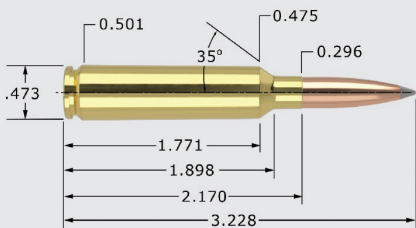

6.5-284 - 129/130 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.228"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b>	129gr. Spitzer	2.980"	0.530	0.264
AccuBond®	<b>AB</b>	130gr. Spitzer	2.980"	0.488	0.266
Reduced Drag Factor™	<b>RDF</b>	130gr. HPBT	2.980"	0.615	0.266
CASE TYPE:	Nosler	PRIMER TYPE	Fed 210M		
CASE HOLDS:	59.4 Gr. WATER	BARREL Length/Make	26" Wiseman		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>H4831SC</b>	51.5 MAX.	2920	90%		
	49.5 *	2844	87%		
	47.5	2769	83%		
<b>H414</b>	48.0 * MAX.	2979	84%		
	46.0	2893	81%		
	44.0	2806	77%		
<b>W760</b> Most Accurate Powder Tested	48.5 MAX.	2984	85%		
	46.5	2889	82%		
	44.5 *	2794	78%		
<b>N160</b>	50.5 MAX.	2999	94%		
	48.5	2901	91%		
	46.5 *	2803	87%		
<b>IMR 4350</b>	50.0 MAX.	3016	90%		
	48.0	2911	86%		
	46.0 *	2805	83%		
<b>RL22</b>	54.0 MAX.	3052	99%		
	52.0 *	2942	95%		
	50.0	2831	91%		
<b>IMR 4831</b>	52.0 MAX.	3069	94%		
	50.0 *	2958	90%		
	48.0	2848	86%		
<b>Hunter</b>	51.5 MAX.	3083	89%		
	49.5 *	2958	86%		
	47.5	2833	82%		
<b>RL19</b>	53.5 MAX.	3095	98%		
	51.5 *	2987	94%		
	49.5	2879	91%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load