


Cartridge

6.5-284 - 140/142 grain

Version 9.0

NOSLER®

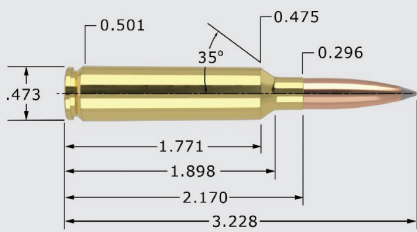

6.5-284 - 140/142 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	3.228"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 140gr. Spitzer	2.980"	0.509	0.287
Ballistic Tip®	BT 140gr. Spitzer	2.980"	0.509	0.287
Custom Competition®	CC 140gr. HPBT	2.980"	0.529	0.287
Partition®	PT 140gr. Spitzer	2.980"	0.490	0.287
Reduced Drag Factor™	RDF 140gr. HPBT	2.980"	0.658	0.287
AccuBond® Long Range	ABLR 142gr. Spitzer	2.980"	0.625	0.291

*1-8" twist recommended for the 142gr AccuBond® Long Range

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210M
CASE HOLDS:	58.4 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	49.0 * MAX. 2768		87%
	47.0 2684		84%
	45.0 2600		80%
W760 Most Accurate Powder Tested	46.5 MAX. 2807		83%
	44.5 2699		80%
	42.5 * 2591		76%
H414	46.5 * MAX. 2817		83%
	44.5 2720		79%
	42.5 2623		76%
N160	48.5 MAX. 2818		92%
	46.5 * 2715		88%
	44.5 2613		85%
IMR 4350	48.0 MAX. 2863		88%
	46.0 2754		84%
	44.0 * 2645		81%
Hunter	50.0 MAX. 2886		88%
	48.0 2782		85%
	46.0 * 2678		81%
IMR 4831	50.0 MAX. 2917		92%
	48.0 2791		88%
	46.0 * 2666		84%
RL22	52.5 MAX. 2922		98%
	50.5 * 2797		94%
	48.5 2673		90%
RL19	52.0 MAX. 2952		97%
	50.0 * 2849		93%
	48.0 2745		89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load