


# Cartridge

6.5 CM - 100 grain

Version 9.0

# NOSLER®

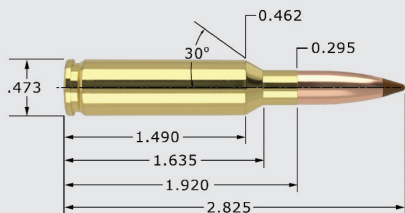

6.5 CM - 100 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	<b>BT</b>	100gr. Spitzer	2.775"	0.350	0.205
Custom Competition®	<b>CC</b>	100gr. HPBT	2.580"	0.362	0.205
Partition®	<b>PT</b>	100gr. Spitzer	2.740"	0.326	0.205

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	50.9 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 8208 XBR</b>	39.5	MAX.	3148	85%
	37.5		3051	81%
	35.5 *		2954	77%
<b>Varget</b>	42.0	MAX.	3165	89%
	40.0 *		3047	85%
	38.0		2929	81%
<b>RL15</b>	42.0	MAX.	3191	86%
	40.0		3086	82%
	38.0 *		2980	78%
<b>TAC</b>	40.0	MAX.	3202	80%
	38.0		3063	76%
	36.0 *		2924	72%
<b>AA 2520</b>	42.0	MAX.	3203	85%
	40.0 *		3092	81%
	38.0		2981	77%
<b>W748</b>	43.0	MAX.	3230	88%
	41.0 *		3110	84%
	39.0		2991	80%
<b>Big Game</b>	47.0	MAX.	3271	94%
	45.0 *		3132	90%
	43.0		2993	86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load