


# Cartridge

6.5 CM - 129/130 grain

Version 9.0

# NOSLER®

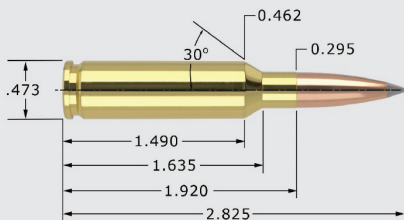

6.5 CM - 129/130 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b>	129gr. Spitzer	2.775"	0.530	0.264
AccuBond®	<b>AB</b>	130gr. Spitzer	2.775"	0.488	0.266
Reduced Drag Factor™	<b>RDF</b>	130gr. HPBT	2.775"	0.615	0.266
CASE TYPE:	Nosler	PRIMER TYPE	Fed 210		
CASE HOLDS:	47.1 Gr. WATER	BARREL Length/Make	24" Pac-Nor		
		BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>RL15</b>	39.0 * MAX.	2807	86%		
Most Accurate	37.0	2693	82%		
Powder Tested	35.0	2578	77%		
<b>Varget</b>	38.5 MAX.	2812	88%		
	36.5 *	2699	84%		
	34.5	2586	79%		
<b>W748</b>	39.5 MAX.	2821	87%		
	37.5	2696	83%		
	35.5 *	2571	79%		
<b>Big Game</b>	43.0 * MAX.	2841	93%		
	41.0	2737	89%		
	39.0	2633	84%		
<b>H4350</b>	43.0 MAX.	2865	97%		
	41.0 *	2752	92%		
	39.0	2639	88%		
<b>Hunter</b>	44.0 MAX.	2870	96%		
	42.0 *	2740	92%		
	40.0	2611	88%		
<b>W760</b>	44.0 MAX.	2902	98%		
	42.0	2784	93%		
	40.0 *	2666	89%		
<b>Hybrid 100V</b>	43.5 MAX.	2935	95%		
	41.5	2800	91%		
	39.5 *	2665	86%		
<b>RL17</b>	43.5 MAX.	2945	96%		
	41.5	2799	91%		
	39.5 *	2652	87%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load