


Cartridge

6.5 CM - 140/142 grain

Version 9.0

NOSLER®

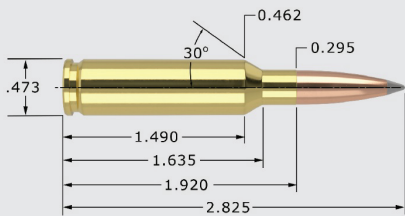

6.5 CM - 140/142 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	2.805"	0.509	0.287
Ballistic Tip®	BT	140gr. Spitzer	2.805"	0.509	0.287
Custom Competition®	CC	140gr. HPBT	2.775"	0.529	0.287
Partition®	PT	140gr. Spitzer	2.790"	0.490	0.287
Reduced Drag Factor™	RDF	140gr. HPBT	2.805"	0.658	0.287
AccuBond® Long Range	ABLR	142gr. Spitzer	2.805"	0.625	0.291

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	46.8 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H380	39.0 * MAX.	2603	88%
	37.0	2496	83%
	35.0	2389	79%
IMR 4895	36.0 * MAX.	2617	84%
	34.0	2499	79%
	32.0	2381	74%
RL15	36.5 * MAX.	2635	81%
	34.5	2502	77%
	32.5	2369	72%
Hybrid 100V	40.0 * MAX.	2658	88%
	38.0	2547	84%
	36.0	2435	79%
W760	40.5 MAX.	2668	91%
	38.5 *	2550	86%
	36.5	2432	82%
H414	40.5 * MAX.	2673	90%
	38.5	2564	86%
	36.5	2455	81%
H4350	41.0 MAX.	2692	93%
	39.0	2585	88%
	37.0 *	2478	84%
Hunter	44.0 MAX.	2730	97%
	42.0	2604	93%
	40.0 *	2479	88%
IMR 4350	41.5 MAX.	2733	95%
Most Accurate	39.5 *	2594	90%
Powder Tested	37.5	2455	86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load