


# Cartridge

6.5 CM - 150 grain

Version 9.0

# NOSLER<sup>®</sup>

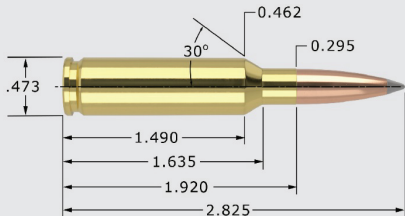

6.5 CM - 150 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond <sup>®</sup> Long Range		<b>ABLR</b> 150gr. Spitzer	2.805"	0.634	0.307
CASE TYPE:	Nosler	PRIMER TYPE		WLR	
CASE HOLDS:	45.2 Gr. WATER	BARREL Length/Make		24" Pac-Nor	
		BARREL Twist		1-8"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4451</b>	42.0 MAX.	2679	99%		
	Most Accurate	40.0	2578	94%	
	Powder Tested	38.0 *	2477	89%	
<b>Hybrid 100V</b>	40.0 MAX.	2681	91%		
	38.0 *	2557	87%		
	36.0	2433	82%		
<b>H4350</b>	41.0 MAX.	2689	96%		
	39.0	2582	91%		
	37.0 *	2476	87%		
<b>IMR 4831</b>	42.0 * MAX.	2717	99%		
	40.0	2599	95%		
	38.0	2481	90%		
<b>StaBall 6.5</b>	43.0 MAX.	2725	97%		
	41.0 *	2602	93%		
	39.0	2478	88%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load