


Cartridge

6.5 Grendel - 100 grain

Version 9.0

NOSLER®

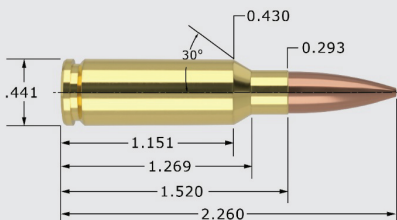

6.5 Grendel - 100 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.260"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip®	BT	100gr. Spitzer	2.245"	0.350	0.205
Custom Competition®	CC	100gr. HPBT	2.145"	0.362	0.205
Partition®	PT	100gr. Spitzer	2.200"	0.326	0.205

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7-1/2
CASE HOLDS:	33.0 Gr. WATER	BARREL Length/Make	24" PacNor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
W748	29.5 MAX.	2506	93%
	28.5 *	2413	90%
	27.5	2319	87%
AA 2230	28.5 * MAX.	2632	88%
	27.5	2548	85%
	26.5	2464	82%
RL10x	25.0 MAX.	2632	85%
	24.0 *	2559	82%
	23.0	2486	78%
IMR 4198	25.0 MAX.	2636	88%
	24.0 *	2535	84%
	23.0	2435	81%
H335	28.5 MAX.	2695	88%
	27.5 *	2570	85%
	26.5	2445	82%
H322	29.0 MAX.	2716	95%
	28.0	2617	92%
	27.0 *	2519	88%
AA 2460	28.5 MAX.	2717	87%
	27.5	2639	84%
	26.5 *	2561	81%
TAC	29.5 * MAX.	2742	91%
	28.5	2653	88%
	27.5	2564	85%
Benchmark	28.5 * MAX.	2742	93%
	27.5	2673	90%
	26.5	2604	87%
IMR 8208 XBR	29.0 MAX.	2745	97%
Most Accurate	28.0 *	2628	93%
Powder Tested	27.0	2511	90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load