


# Cartridge

## 6.5 Grendel - 120 grain

Version 9.0

# NOSLER®

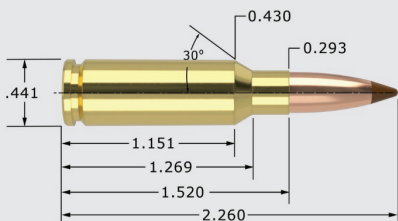

## 6.5 Grendel - 120 grain

## 6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	<b>BT</b> 120gr. Spitzer	2.245"	0.458	0.246
Expansion Tip®	<b>ET</b> 120gr. Spitzer	2.215"	0.497	0.246

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7-1/2
CASE HOLDS:	29.0 Gr. WATER	BARREL Length/Make	24" PacNor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4198</b>	22.3 * MAX. 2223		86%
	21.3 2140		83%
	20.3 2058		79%
<b>H322</b>	25.0 MAX. 2269		93%
	24.0 * 2172		89%
	23.0 2074		86%
<b>H335</b>	27.3 * MAX. 2351		96%
	26.3 2260		92%
	25.3 2169		89%
<b>X-Terminator</b>	27.0 MAX. 2370		95%
	26.0 * 2294		92%
	25.0 2218		88%
<b>Benchmark</b>	26.5 * MAX. 2431		99%
	25.5 2338		95%
	24.5 2245		91%
<b>IMR 8208 XBR</b>	27.5 MAX. 2478		** 104%
	26.5 * 2360		100%
	25.5 2242		97%
<b>AA 2520</b>	29.5 MAX. 2482		** 105%
	28.5 2404		** 101%
	27.5 * 2325		98%
<b>AA 2460</b>	27.0 MAX. 2490		94%
	26.0 * 2378		91%
	25.0 2266		87%
<b>TAC</b>	28.0 MAX. 2493		98%
	Most Accurate 27.0 * 2379		95%
	Powder Tested 26.0 2265		91%
<b>RL15</b>	30.0 MAX. 2519		** 108%
	29.0 * 2431		** 104%
	28.0 2343		101%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load