


Cartridge

6.5 Grendel - 123/125 grain

Version 9.0

NOSLER®

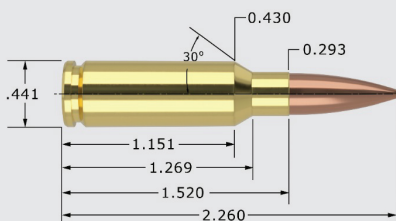

6.5 Grendel - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	123gr. HPBT	2.250"	0.510	0.252
Partition®	PT	125gr. Spitzer	2.240"	0.449	0.256

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7-1/2
CASE HOLDS:	30.0 Gr. WATER	BARREL Length/Make	24" PacNor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
X-Terminator	25.7 MAX. 2305		88%
	24.7 2229		84%
	23.7 * 2154		81%
AA 2460	26.0 MAX. 2320		88%
	25.0 * 2240		84%
	24.0 2161		81%
IMR 4198	23.5 MAX. 2346		91%
	22.5 2291		87%
	21.5 * 2235		83%
Benchmark	26.5 MAX. 2366		95%
	25.5 * 2272		92%
	24.5 2178		88%
RL15	28.0 * MAX. 2398		97%
	27.0 2305		94%
	26.0 2212		90%
H335	27.5 MAX. 2410		93%
	26.5 * 2329		90%
	25.5 2247		86%
IMR 4895	28.0 * MAX. 2414		** 102%
	27.0 2346		98%
	26.0 2278		94%
IMR 8208 XBR	27.0 MAX. 2420		99%
	Most Accurate 26.0 * 2324		95%
	Powder Tested 25.0 2228		92%
TAC	27.5 MAX. 2438		93%
	26.5 * 2334		90%
	25.5 2230		86%
AA 2520	28.5 * MAX. 2484		98%
	27.5 2393		95%
	26.5 2302		91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load