


Cartridge

6.5 Grendel - 129/130 grain

Version 9.0

NOSLER®

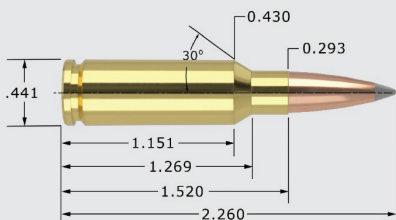

6.5 Grendel - 129/130 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	129gr. Spitzer	2.260"	0.530	0.264
AccuBond®	AB	130gr. Spitzer	2.240"	0.488	0.266
Reduced Drag Factor™	RDF	130gr. HPBT	2.260"	0.615	0.266
CASE TYPE:	Nosler	PRIMER TYPE	Rem 7-1/2		
CASE HOLDS:	28.7 Gr. WATER	BARREL Length/Make	24" PacNor		
		BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 2520	27.5 MAX.	2258	99%		
	26.5 *	2166	95%		
	25.5	2074	92%		
Varget	27.0 * MAX.	2259	**		102%
	26.0	2178	98%		
	25.0	2097	94%		
BL-C(2)	28.5 MAX.	2269	101%		
	27.5 *	2187	97%		
	26.5	2106	94%		
W748	28.5 * MAX.	2277	**		103%
	27.5	2204	100%		
	26.5	2131	96%		
IMR 4166 Most Accurate Powder Tested	26.0 MAX.	2338	96%		
	25.0 *	2271	93%		
	24.0	2204	89%		
RL15	29.0 * MAX.	2364	**		105%
	28.0	2278	**		102%
	27.0	2192	98%		
H4895	26.5 MAX.	2406	**		101%
	25.5 *	2322	98%		
	24.5	2238	94%		
IMR 8208 XBR	27.0 MAX.	2431	**		103%
	26.0	2352	100%		
	25.0 *	2273	96%		
TAC	27.5 MAX.	2440	97%		
	26.5	2360	94%		
	25.5 *	2279	90%		
CFE 223	31.0 MAX.	2511	**		108%
	30.0 *	2441	**		105%
	29.0	2371	**		101%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load