


# Cartridge

6.5 Grendel - 90 grain

Version 9.0

# NOSLER®

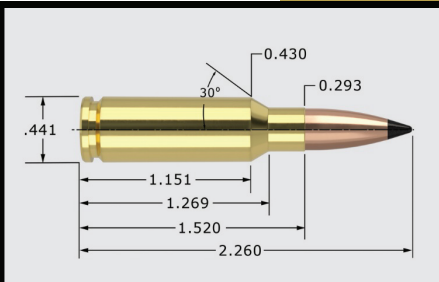

6.5 Grendel - 90 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Varmageddon®	VMG	90gr. FB Tipped	2.240"	0.350	0.184
CASE TYPE:	Nosler	PRIMER TYPE		WSR	
CASE HOLDS:	32.0 Gr. WATER	BARREL Length/Make		24" Pac-Nor	
		BARREL Twist		1-8"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>N133</b>	28.5 * MAX.	2864	** 104%		
	27.5	2757	100%		
	26.5	2649	96%		
<b>LT-32</b>	28.0 MAX.	2864	100%		
	27.0	2760	96%		
	26.0 *	2656	92%		
<b>RL10x</b> Most Accurate Powder Tested	28.0 MAX.	2871	98%		
	27.0 *	2767	95%		
	26.0	2663	91%		
<b>AA 2230</b>	29.5 MAX.	2891	94%		
	28.5 *	2798	91%		
	27.5	2704	88%		
<b>H335</b>	31.0 * MAX.	2916	98%		
	30.0	2818	95%		
	29.0	2720	92%		
<b>Benchmark</b>	30.5 MAX.	2926	** 103%		
	29.5 *	2805	100%		
	28.5	2684	96%		
<b>TAC</b>	31.5 MAX.	2931	100%		
	30.5 *	2833	97%		
	29.5	2735	94%		
<b>X-Terminator</b>	31.0 MAX.	2946	99%		
	30.0	2846	96%		
	29.0 *	2746	93%		
<b>AA 2520</b>	32.0 * MAX.	2949	** 103%		
	31.0	2858	100%		
	30.0	2766	97%		
<b>IMR 8208 XBR</b>	31.0 MAX.	2953	** 106%		
	30.0	2849	** 103%		
	29.0 *	2744	100%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load