


Cartridge

6.5 PRC - 120 grain

Version 9.0

NOSLER®

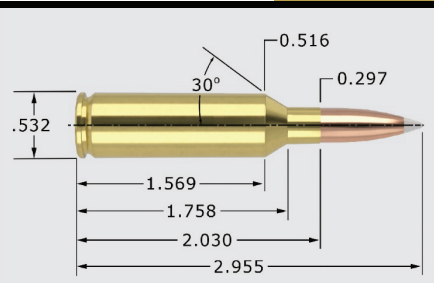

6.5 PRC - 120 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.955"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT 120gr. Spitzer	2.775"	0.458	0.246
Expansion Tip®	ET 120gr. Spitzer	2.775"	0.497	0.246

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Hornady	PRIMER TYPE	WLR
CASE HOLDS:	64.6 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4955	53.0 MAX. 3175	[Bar]	87%
	51.0 * 3075	[Bar]	84%
	49.0 2974	[Bar]	81%
H1000	59.0 MAX. 3204	[Bar]	97%
	57.0 * 3101	[Bar]	93%
	55.0 2999	[Bar]	90%
IMR 7828	55.0 MAX. 3213	[Bar]	91%
	53.0 3109	[Bar]	87%
	51.0 * 3006	[Bar]	84%
IMR 4831	53.0 MAX. 3225	[Bar]	88%
	51.0 * 3112	[Bar]	84%
	49.0 2999	[Bar]	81%
RL22	56.0 MAX. 3250	[Bar]	94%
	54.0 * 3144	[Bar]	91%
	52.0 3038	[Bar]	87%
MAGPRO	63.0 MAX. 3274	[Bar]	** 101%
	61.0 * 3176	[Bar]	97%
	59.0 3078	[Bar]	94%
PP 4000-MR	55.0 MAX. 3276	[Bar]	90%
	53.0 3172	[Bar]	86%
	51.0 * 3069	[Bar]	83%
RL26	58.0 MAX. 3288	[Bar]	92%
	56.0 3175	[Bar]	88%
	54.0 * 3062	[Bar]	85%
Norma MRP	59.5 MAX. 3373	[Bar]	** 101%
	Most Accurate 57.5 3275	[Bar]	98%
	Powder Tested 55.5 * 3177	[Bar]	94%
Magnum	65.0 MAX. 3413	[Bar]	** 102%
	63.0 * 3324	[Bar]	99%
	61.0 3235	[Bar]	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load